


Digitalthermostat TH-DIGITAL-10

Digital thermostat TH-DIGITAL-10

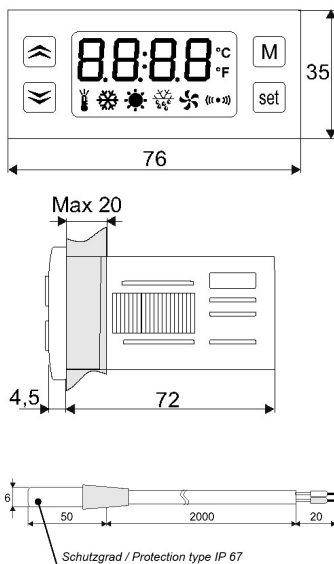

Stromversorgung <i>Power supply</i>	230 V~ ±15% ; 12 V=/~, max 3 VA
Eingang <i>Input</i>	Temperatursensor: NTC 5k bei 25°C; 2m Kabel Digital-Eingang (normal offen oder geschlossen) <i>Temperature sensor: NTC 5k at 25°C; cable 2m</i> <i>Digital input (normally open or closed)</i>
Messbereich <i>Measuring range</i>	-50...+150°C
Messgenauigkeit <i>Measurement accuracy</i>	±0,5%
Abtastperiode <i>Sampling period</i>	330 ms
Relais <i>Relay</i>	30 A, 250 V~ 10 ⁵ Zyklen/ cycles
Max. ohmsche Belastung <i>Max. ohmic load</i>	20 A, 4500 W
Max. induktive Belastung <i>Max. inductive load</i>	8 A, 1500 W, 2HP (2KM)
Auflösung der Anzeige <i>Display resolution</i>	0,1°C
Display	0,1°C
Einstellung Methode <i>Setting method</i>	EIN-AUS mit Hysterese <i>ON-OFF with hysteresis</i>
Betriebstemperatur <i>Operating temperature</i>	-5...+60°C; 0...85 R.H. (nicht kondensierend / <i>non-condensing</i>)
Lagertemperatur <i>Storage temperature</i>	-40...+85°C; 0...85 R.H. (nicht kondensierend / <i>non-condensing</i>)
Schutzart/Schutzklasse <i>Degree of protection/protection class</i>	IP65 / II

Artikel-Bez. <i>Article name</i>	Artikel-Nr. <i>Article no.</i>	Bezeichnung <i>Description</i>
TH-DIGITAL-10	110472	Thermostat mit Digitalanzeige und Wechslerkontakt <i>thermostat with digital display and changeover contact</i>