



## SOCKET SD 035



**Connection:** 3 x pressure clamps for stranded and rigid wire 0.5 - 2.5mm<sup>2</sup>  
**Mounting:** clip for 35mm DIN rail, EN 60715  
**Casing:** plastic according to UL94 V-0, light grey  
**Fitting position:** variable  
**Operating temperature:** -45 bis +70 °C (-49 bis +158 °F)  
**Storage temperature:** max. 90% RH (non-condensing)  
**Fuse:** Ø 5 x 20mm  
**Protection type/Protection class:** IP20 / I (earthed)  
**Weight:** approx. 0,2kg  
**Dimensions:** 92 x 62 x 48mm

**Approbation:** **corresp. RoHS,**  
*EAC (SD035-D/D-O),*  
*UL File No. E222026 (SD035-USA/USA-O)*

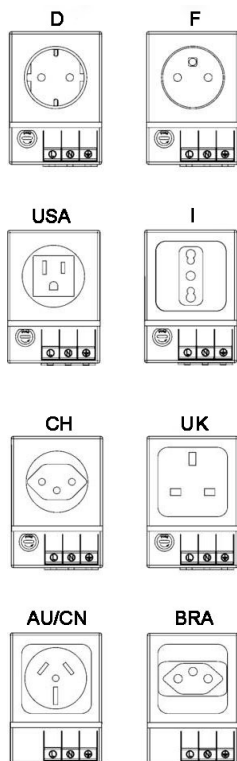

Type	Order No.	Country (fuse or w/o fuse)	Operating voltage	Nominal current
SD035-D	103170	Germany/Russia with fuse	250 VAC	6,3 A
SD035-D-O	100941	Germany/Russia without fuse	250 VAC	16 A
SD035-AU/CN-O	100667	Australia/China without fuse	240 VAC	10 A
SD035-BRA-O	102360	Brazil without fuse	250 VAC	10 A
SD035-CH	103167	Switzerland with fuse	250 VAC	6,3 A
SD035-CH-O	100835	Switzerland without fuse	250 VAC	10 A
SD035-F	103173	F/PL/CZ/SK with fuse	250 VAC	6,3 A
SD035-F-O	101028	F/PL/CZ/SK without fuse	250 VAC	16 A
SD035-GB	103176	UK/Ireland with fuse	250 VAC	6,3 A
SD035-GB-O	101043	UK/Ireland without fuse	250 VAC	13 A
SD035-I	101923	Italy with fuse	250 VAC	6,3 A
SD035-I-O	101087	Italy without fuse	250 VAC	16 A
SD035-USA	103179	USA/Canada with fuse	125 VAC	6,3 A
SD035-USA-O	101108	USA/Canada without fuse	125 VAC	15 A